



RibBracket II


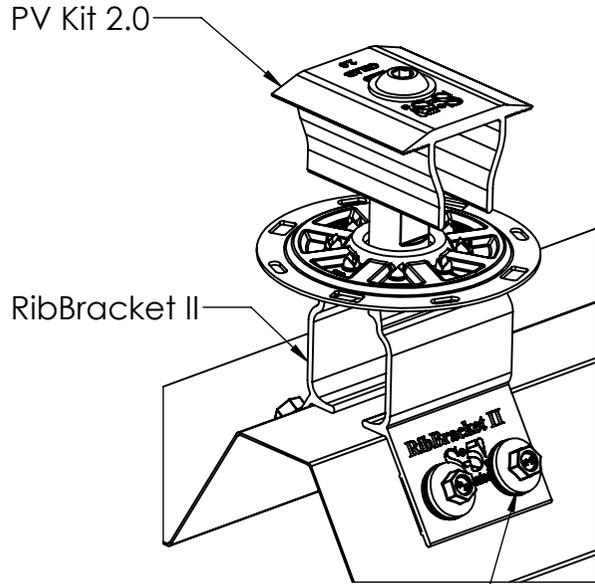


(4x) 1/4" Diameter 1" Length
5/16" Hex Screw

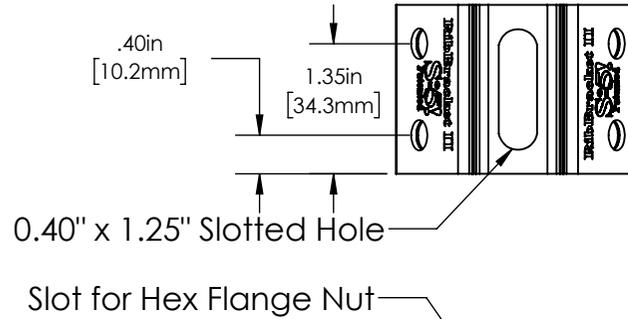



0.40" x 1.25" Slotted Hole

Slot for Hex Flange Nut

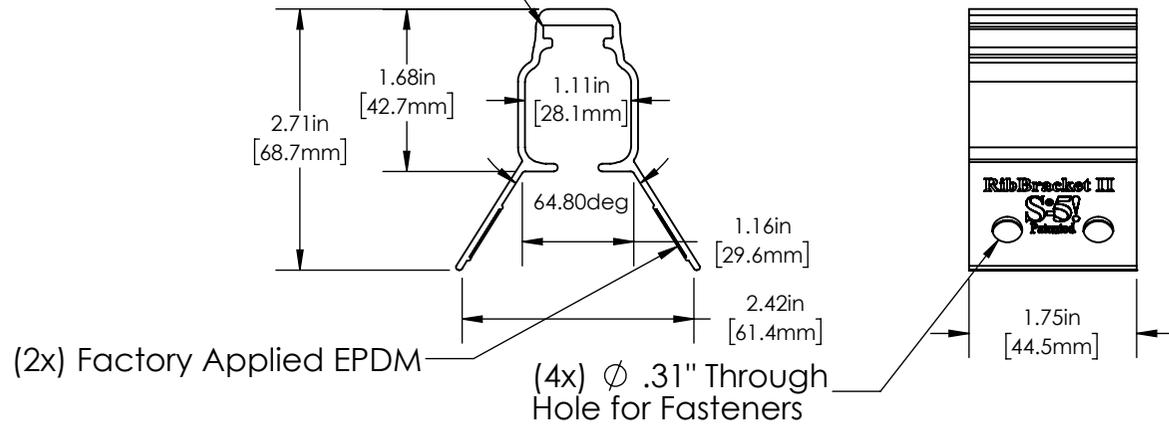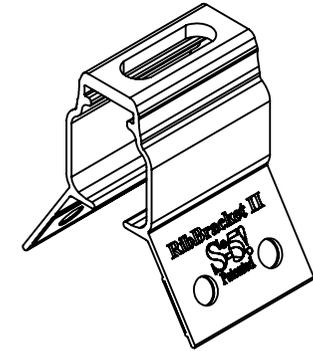

(2x) Factory Applied EPDM

(4x) ϕ .31" Through Hole for Fasteners

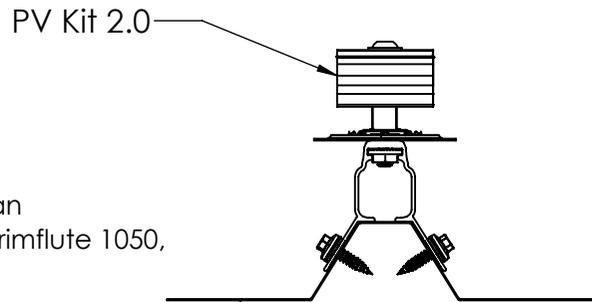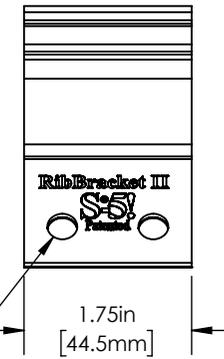

Sample Rib Roof Panel

Designed to fit popular African and Australasian profiles such as Lysaght Trimdek 1015, Safinta Trimflute 1050, and other similarly dimensioned profiles.

FOR STANDING SEAM SPECIFIC MECHANICAL LOAD TEST INFORMATION AND CLAMP INSTALLATION INFORMATION PLEASE VISIT: WWW.S-5.COM

MATERIAL: 6005A T61		METAL ROOF INNOVATIONS, LTD. 8655 TABLE BUTTE RD COLORADO SPRINGS, CO 80908 719-495-0518 719-495-0045(FAX)	
EST ASSEMBLY WEIGHT 0.179 lbs			
SUPPLIED HARDWARE: M8-1.25 Flange Nut (4x) 1/4"-1" Stainless Steel Self-Tapping Screw with 5/16" Hex Head	TITLE RibBracket II [CCD]		
SCALE: 1:2	DRAWING NO. LTD-A-0-A	DRAWN BY Jesse Winternitz	DATE 7/1/2019
WEIGHTS: Bracket: 0.0920 lbs Screw: 0.0180 lbs Nut: 0.0145 lbs	S-5!® PRODUCTS ARE PROTECTED BY MULTIPLE U.S. PATENTS INCLUDING 5,228,248, 5,983,588 AND 6,164,033 (OTHERS ISSUED AND PENDING). EUROPEAN PATENTS ARE ALSO APPLIED FOR AND PENDING UNDER THE PATENT COOPERATION TREATY WITH DIVISIONAL FILING RIGHTS RETAINED. METAL ROOF INNOVATIONS, LTD. (LICENSOR OF S-5!® TECHNOLOGY) AGGRESSIVELY PROSECUTES PATENT INFRINGEMENT.		